

# Airborne Particle Counter **KC-03B**

Measures 0.3  $\mu\text{m}$  particles in 3 L/min sample airflow  
Validation-Related Technology



- JIS B 9921 compliant
- Simultaneous 5-stage particle measurement and display  
 $\geq 0.3 \mu\text{m}$ ,  $\geq 0.5 \mu\text{m}$ ,  $\geq 1 \mu\text{m}$ ,  $\geq 2 \mu\text{m}$ ,  $\geq 5 \mu\text{m}$
- Simpler operation made possible by automatic flow control
- Measurement results by thermal printer installed internally  
(measurement value, particle density, average value)
- Serial interface function enables communication with PCs
- D/A converter interface enables direct connection to measurement instruments (factory option)


**Specifications** [KC-03B]

Optical system	Light-scattering method
Light source	Laser diode, wavelength: 780 nm, rated output: 40 mW
Laser product class	Class 1, IEC 60825-1
Light detector	Photodiode
Flow rate	3 L/min
Size range (5 channels)	≥0.3 μm, ≥0.5 μm, ≥1 μm, ≥2 μm, ≥5 μm
Maximum particle number concentration	30 000 particles/L (coincidence loss 5 %)
Measurement time	
Random time	10 sec to 2 h and manual
Sample flow rate	1 L (20 sec), 2.83 L (57 sec), 10 L (3 m 20 sec), 28.3 L (9 m 26 sec)
Measurement display	Accumulated value, differential value, particle density (unit: 1 L, 28.3 L, 1 000 L)
Input/output connectors	
ALARM	Terminals are shorted when the selected particle size measurement value reaches the preset alarm level.
SERIAL	D-sub 9pin (male)
Internal printer	Thermal line/dot
Environmental conditions for operation	5 °C to 35 °C, 30 % to 80 % (no condensation if printer is used)
Power	100 V to 240 V AC, 50/60 Hz, approx. 65 VA
Dimensions and weight	Approx. 135 (H) × 300 (W) × 300 (D) mm (excluding projections), approx. 7.3 kg
Accessories	Sampling pipe × 1 Sampling tube (vinyl, φ7 mm × φ5 mm, 2 m) × 1 Air filter × 1 Power cord (for use in Japan, 2.5 m) × 1 Thermal paper TP-08 × 2


Factory options	External start/stop Outlet D/A converter interface KZ-25-S01
Options	Communication cable CC-61A/63A (9pin use) Trunk* KC-01-521 Thermal paper TP-08 (6-roll pack) Lint-free thermal paper TP-10 (6-roll pack)

\*This is for storage only. It is not capable of any transportation.


**External configuration** (unit : mm)



Front view



Side view



Top view

\* Company names and product names mentioned in this catalog are usually trademarks or registered trademarks of their respective owners.  
\* Specifications subject to change without notice.


Distributed by:

**RP Monitor Evo10 K1701 Ver.2** Option

Used for controlling particle counters to regulate the start/end of measurement and turn the light source/built-in pump on and off. Available setting parameters include measurement time, period, number of measurements, alarm, and conversion.

- Allows control of up to 8 particle counters in serial mode, using 8 ports.

Operating system: Microsoft Windows 10 Pro 64 bit / 11 Pro 64 bit

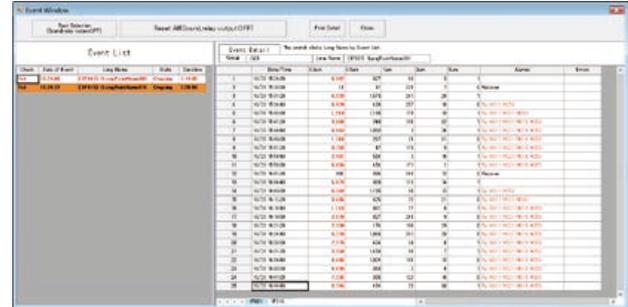

Sample display



3-20-41, Higashimotomachi, Kokubunji,  
Tokyo 185-8533, Japan  
Tel: +81-42-359-7878, Fax: +81-42-359-7445